


Product details		Hywood Collection
		Herringbone Collection
Format		774 x 129 x 11 mm
Bevel		4-sided micro bevel
Profile		CLICKIT EASY HB
Packaging	Package:	20 Piece/Pack ( 10 x A / 10 x B Piece)
	Pallet:	44 Box/Pallet (87,868 m <sup>2</sup> )
Weight	Package:	ca. 20,16 kg
	Pallet:	ca. 902,48 kg

Product construction:	
	1. Nature Protec surface finish
	2. Real wood top layer
	3. Wood Powder layer
	4. HDF baseboard
	5. Wood Powder layer
	6. Real wood stabilizing layer

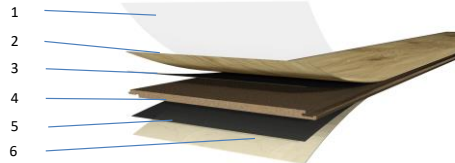

Tolerances to DIN EN 14354:2017		
	Prüfnorm DIN EN 14354:2017	Requirements
Thickness t of an element	Appendix A	<sup>t</sup> max - <sup>t</sup> min ≤ 0,50 mm <sup>t</sup> mittel - <sup>t</sup> nenn ≤ ±0,50 mm
Length l of the surface layer in the same packaging unit	Appendix A	l ≤ 1 500 mm: <sup>l</sup> max - <sup>l</sup> min ≤ 0,50 mm l > 1 500 mm: <sup>l</sup> max - <sup>l</sup> min ≤ 0,30 mm/m <sup>l</sup> mittel - <sup>l</sup> nenn ≤ 1 mm
Width w of the surface layer	Appendix A	<sup>w</sup> max - <sup>w</sup> min ≤ 0,20 mm <sup>w</sup> mittel - <sup>w</sup> nenn ≤ 0,10 mm
Squareness	Appendix A	<sup>q</sup> max ≤ 0,20 mm
Deviation from the edge straightness of the surface layer s	Appendix A	<sup>s</sup> max ≤ 0,30 mm/m
Height difference between elements	Appendix B	<sup>f</sup> max ≤ 0,15 mm
Gap opening between elements	Appendix B	≤ 0,20 mm

Warranty (domestic usage) (according to separate terms of warranty)	Lifetime (private living rooms)	Warranty commercial sector (according to separate terms of warranty)	10 years (commercial sector)	
--	------------------------------------	---	---------------------------------	--



Product properties:		
	Prüfnorm	Evaluation
Thermal conductivity	EN 12664:2001-01	0,15 W/(m*K)
Thermal resistance	DIN EN 4108-4	0,07 (m <sup>2</sup> .K)/W
PCP-content	CEN/TR 14823:2004	PCP ≤ 5 x 10 <sup>-6</sup> m
Formaldehyde	EN 717-1:2004-10	E1
Reaction to fire	DIN EN 13501-1	Bfl-s1 (when bonding to screed)
Resistance to chair castors	DIN EN 13329	No change if soft chair castors are used
Underfloor heating	DIN EN 1264-2	Suitable for installation on warm water underfloor heating systems. The surface temperature must not exceed 29 °C. Also suitable for installation on electric heating systems equipped with temperature control and low heat-up technology. For heating systems with recooling, this must be equipped with an automatic control for dew point regulation to avoid condensation. Bonding to the underground is recommended to achieve a better efficiency for underfloor heating.
Type of installation	EN 13489	Suitable for floating installation or glue down installation. We recommend low emission trowel and adhesive products for glue down. ( e.g. according to RAL-UZ 113)
Disposal		Remaining pieces may be disposed of with household waste, Large quantities, e.g. at recycling centres (in accordance with municipal regulations).
Floor underlay mat - requirement	CS= DIN EN 16354:2019-01 CC= based on DIN EN 826	CS ≥ 60 kPa & CC ≥ 5 kPa

Surface properties			
Variants:			
Slip resistance inclined plane	DIN EN 16165:2021-10		R10
Stain resistance	68861-1		1B
Scratch resistance	Hamberger Hobel		≤20 N
Änderung durch:	ter Hürne	Datum:	Jul. 22
			www.terhuerne.de